

WAC LIGHTING

Wave

Bathroom Vanity & Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-87117 17"	3000K	CH Chrome	15W	544	332

Example: **WS-87117-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION


Glistens like the sun on the ocean currents.

FEATURES

- Edge lit v-groove twist acrylic diffuser
- Backlight with recessed silicone diffuser
- Oval canopy
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, acrylic diffuser

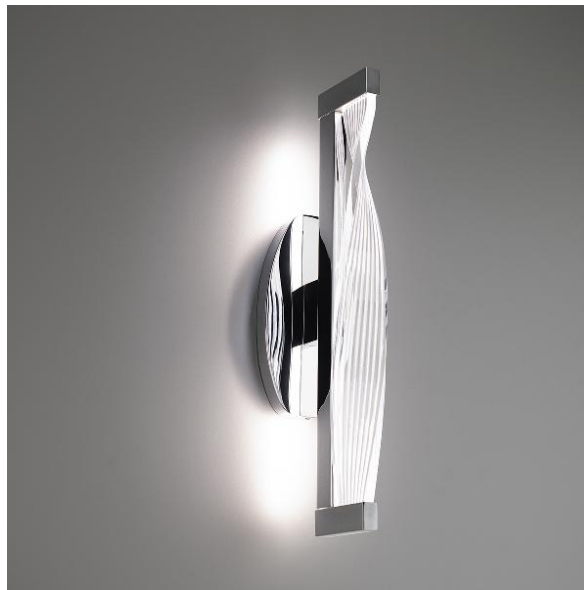


FINISHES:



Chrome

LINE DRAWING:

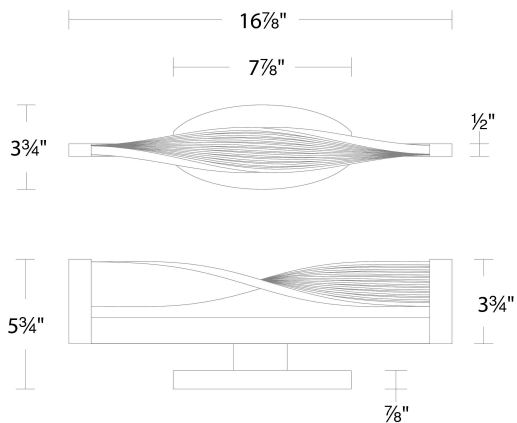

WS-87117

WAC LIGHTING

Wave

Bathroom Vanity & Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-87128 28"	3000K	CH Chrome	30W	1060	769

Example: **WS-87128-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Glistens like the sun on the ocean currents.

FEATURES

- Edge lit v-groove twist acrylic diffuser
- Backlight with recessed silicone diffuser
- Oval canopy
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, acrylic diffuser




FINISHES:



Chrome

LINE DRAWING:

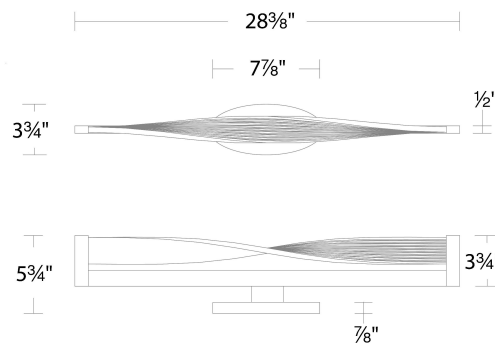

WS-87128